

• • • , • • •



The work objective is to create the tools method for controlling a technical status of the mechanical members of the vehicle parts of railway locomotives using a criterion for fatigue cracking through their welded joints. The on-board measuring complex for dynamic and structural running tests of the structural member of the DS3 electric locomotive, the computer simulation of a stressed-strained state of a welded joint, the strain-measuring null-indicator method of detection of fatigue cracks have been employed.

It is found that fatigue cracking through the welded joint results from the defect of a leg at the site of initiation of maximal tensile stresses, a supernumerary work of a hydraulic damper of the suspension axle box stage. Using the computer simulation of a stressed-strained state of the welded crack-free joint, with the fatigue crack of a semi-elliptic form, the capability of its detection prior to critical dimensions at the inaccessible site of the structural member with our strain-measuring null indicator method is demonstrated.

Conclusions about the verification of the quality of repair of welded joints of the mechanical members for the vehicle parts of railway locomotives under real operational conditions without fatigue cracking are made.

• • • , • • • , • • • ,
 • • • , • • • , • • •
 • • • , • • • , • • •

[1 - 4].

[2].

15 [5].

2 - 3 ,

10 -

80%

[6].

[7].

3 003,

”,

2

\bar{P}

“

3,

(. 1,).


”

“

100

(. 1,).

4

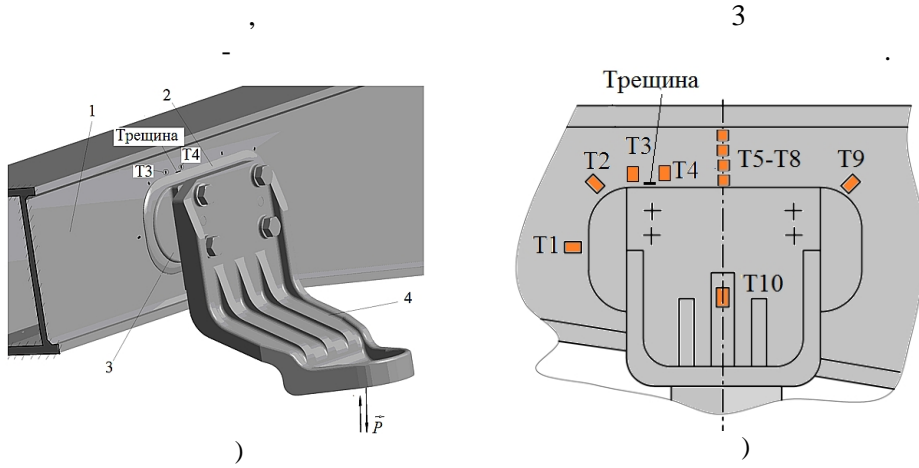


. 1, 1- 10
 . 5 - 8 -

. 1 3 003. . 1,
 09 2 19903-74, - 20 1977-88.
 8713-79



(2246-70).
 4 (. 1,) 20 / .
 (. 2,),
 σ (. 2,)

-6 [8]
 [9].

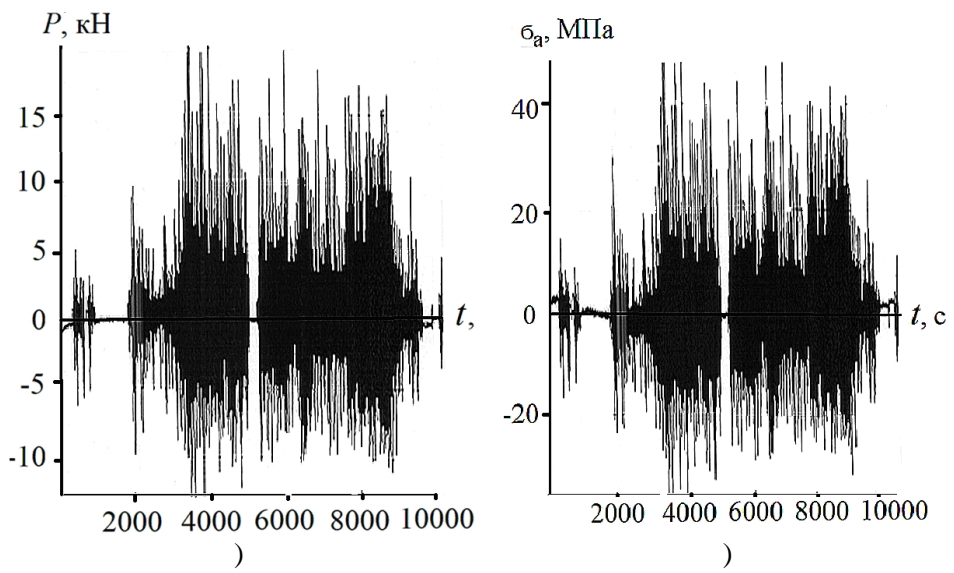

. 2

$\bar{P} (.2,)$, $\sigma (.2,)$
 t
 \bar{P}
 σ ,
 \bar{P} 50 17500 3.4
0-11
[10].
 \bar{P} 40
45°, \bar{P}
.1. (.3) ANSYS [11].
1200 °-20 °
(.3,) 1
(.1). 10

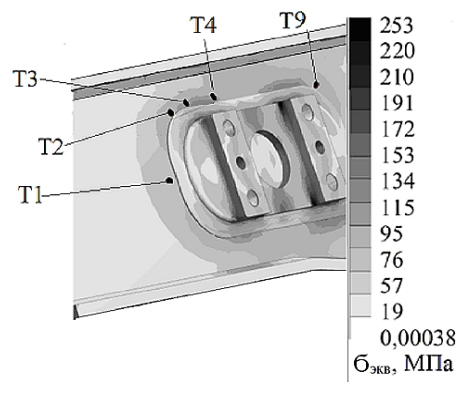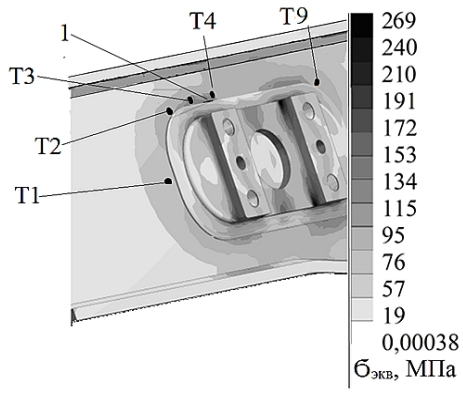

)

)

.3

[12]

σ . σ

σ

\bar{P}

.1


1

	1	2	3	4	6	
σ ,	12,0	32,5	42,5	50,0	32,6	3, 4 60
σ .	12,1	33,5	43,2	50,2	33,3	3, 4 60
σ .	13,0	34,3	43,6	54,6	35,7	3, 4 60
σ .	13,5	35,3	43,6	25,6	34,7	10 60 3, 4
σ .	13,5	35,3	83,6	23,6	34,7	7 3, 4 10

09 2

[13].

\bar{P}
 4 3 11 (σ . 1),
 09 2 = $5,24 \cdot 10^{-5}$.
 4
 18 (. 1),
 | | = $8,57 \cdot 10^{-5}$.

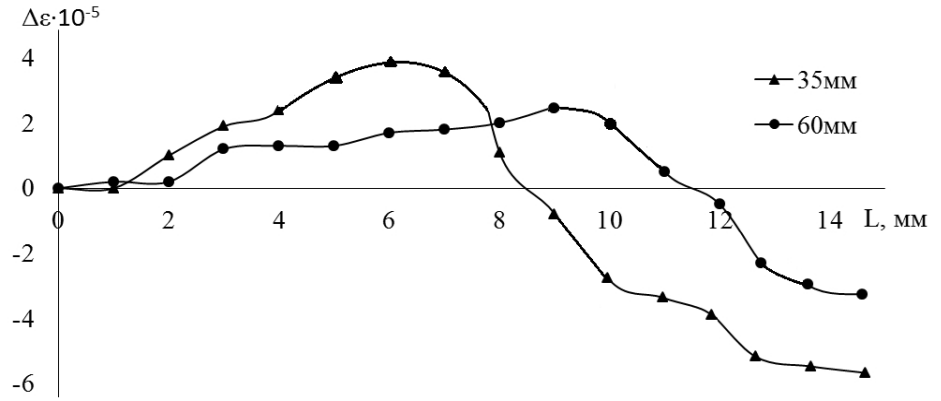

. 1).
 | | = $2,86 \cdot 10^{-4}$.

60 , 35 $3,5 \cdot 10^{-5}$, $6,3 \cdot 10^{-5}$
 (. 4).

$-6 [14]$
 $2,5 \cdot 10^{-5}$.

[15].

1. *Schabert H. M.* Bench-Tests Rahmen erlebt Karren in Entwicklungsprozess / *H. M. Schabert, C. H. Moser* // *Zev. Rail. Glasers Annalen.* – 2000. – 4. – . 291 – 296.
2. *Schmidt S.* Die Produktion von Lkw-Rahmen-Werk in Graz / *S. Schmidt* // *Zev. Rail. Glasers Annalen.* – 2001. – 3. – . 89 – 95.
3. . . . // – 2004. – 4. – . 39 – 45.
4. *Polach O.* Bogie design for better dynamic performance. Example of a locomotive bogie / *O. Polach* // *Europen railway review.* – 2003. – 1. – . 69 – 74.
5. . . . 50-694-90. – [. . . . 01.07.91]. – , 1991. – 83 .
6. *Troshchenko V. T.* Conditions for the Transition from Nonlocalized to Localized Damage in Metals and Alloys. Part 2. Duration of Fatigue Crack Initiation and Propagation Stages / *V. T. Troshchenko, L. A. Khamaza* // *Strength of Materials.* – 2014. – Vol. 5. – P. 5 – 20.
7. *Leonets V. A.* Assessment of the null-indicator method for the detection of fatigue cracks in structural elements / *V. A. Leonets, A. O. Lukashevych, V. O. Degtyarev, L. M. Chau* // *Strength of Materials.* – 2012. – Vol.44, No 3. – . 325 – 332.
8. . . . // – 2002. – 9. – . 73 – 76.
9. . . . // – 1969. – 7. – . 24 – 29.
10. . . . // – 2009. – 10. – . 48 – 51.
11. *Kent L. Lawrence.* ANSYS workbench Tutorial Release 11 / *L. Lawrence Kent.* – Kansas : Schroff Development Corporation, 2007. – 236 p.
12. . . . // , 1973. – 671 .
13. *Demirdogen C.* Sheet Metal Forming / Crimping Simulation in ANSYS / *C. Demirdogen, H. Oka, T. Ogut* // *International ANSYS Conference, USA, Pittsburgh.* – 2004. – 9 p.
14. . . . // – 2006. – . 26. – . 282 – 286.
15. *Lukashevich A. O.* Strain-gauge method of detecting subcritical fatigue cracks in low-carbon steel welds/ *A. O. Lukashevich, V. A. Leonets, L. M. Chau* // *Strength of Materials.* – 2015. – Vol. 47, No. 3. – P. 467 – 473.

17.02.2016
28.03.2016