

.
 ,
 ,
 ,
 .
 ,
 ,
 .
 ()
 .
 . “ — ”
 .
 () [1, 2].
 [3],
 [4],
 [5]
 .
 ,
 , 1 .
 , (press-fit) [1, 6].
 ,
 .
 ,
 , 48,
 50 ,
 ,
 48 .
 ,
 ,
 .
 .
 .
 .

[6]

— — — “ () ,

(.1),

1 ,


(.2).

0,03 (30 / ²) 12 (1200 / ²).

(.1,

1).


(.1, 2).



1 – 1000 ;
2 –

.1

.3

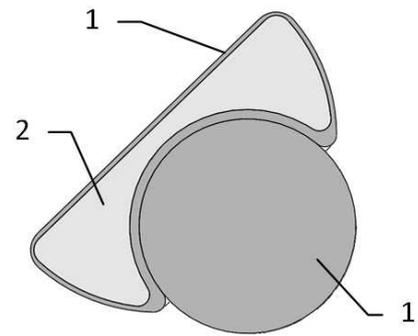

1 – ;
2 –

.2


6÷7

0,09


4÷11 [2].

16,24

150-290 [2].

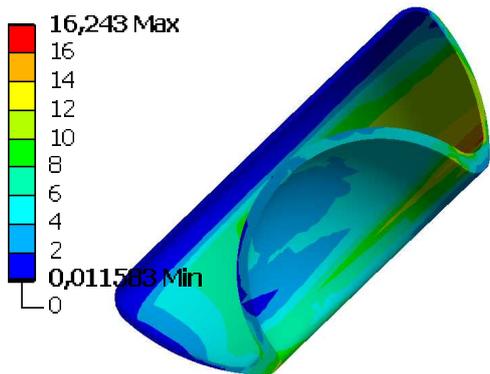

3-4

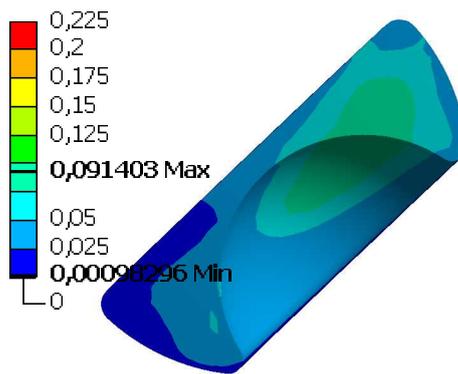

)



)

.3

)

(

.4.

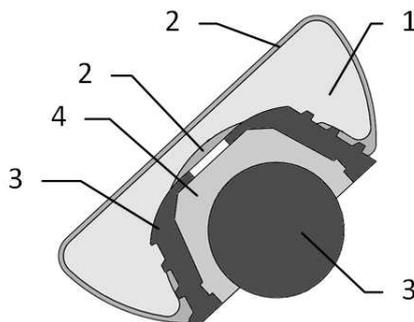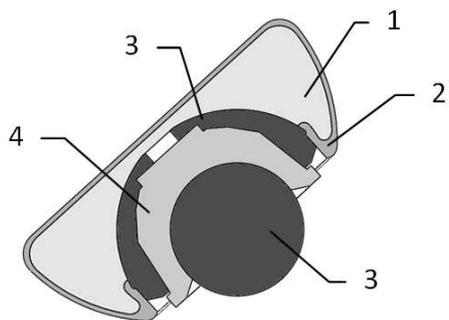

)

)

1-

; 2-

; 3-

; 4-

.4

24,8

49,25

24,8

- 49

28



[3, 6]:

- () - 200 ($2 \cdot 10^5 / \text{mm}^2$);
- () - 106 ($1,06 \cdot 10^5 / \text{mm}^2$);
- () - 0,5 ($500 / \text{mm}^2$).


(.5),

16,38


0,14

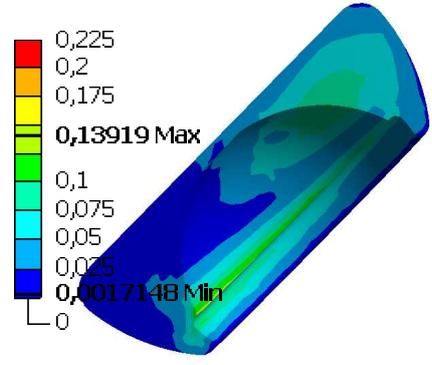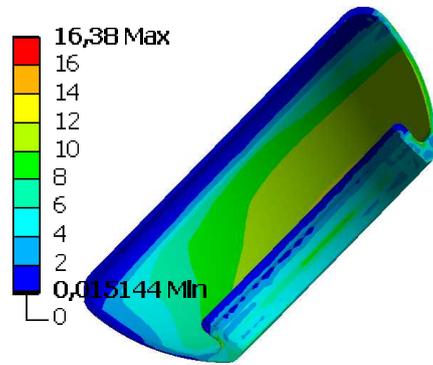

(.6)

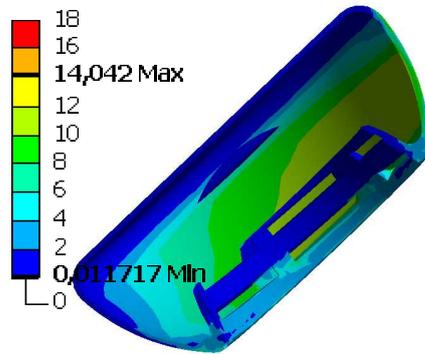

(.3).

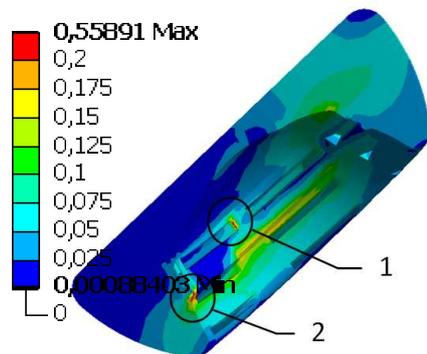

1 2)

1

0,2

	16,24	0,09
	16,38	0,14
	14,04	0,2 (0,56*)

* _

1. .: , 2010. – 344 .
2. . . . // – 2000. – 3. – . 28 – 31.
3. – 2008. – 17 .
4. Weber W. Improvement of reliability of ceramic hip joints / W. Weber, M. Zahne, W. Rieger // Eur. Cells Materials. – 2002. – 3, Suppl. 1. – P. 16 – 17.
5. Finite element modeling of contact mechanics of hemi – of human hip joint. Part II. Polycarbonate urethane on cartilage contact / A. C. Cilangira, V. Ucara, I. J. Udofiab, Z. M. Jinbbiphasik // Trends Biomater. Artif. Organs. – 2008. – 22(2). – P. 61 – 68.
6. . . . // – 2014. – 1. – . 67 – 72.

26.01.15,
04.03.15